


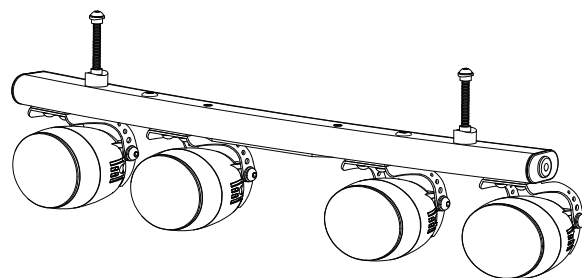



### Light Bar Hardware




### Tools Required





**A**

To start, remove the 4 rubber plugs that are installed on the forward tower tube as illustrated. These are press fit rubber plugs that do not require tools to remove.

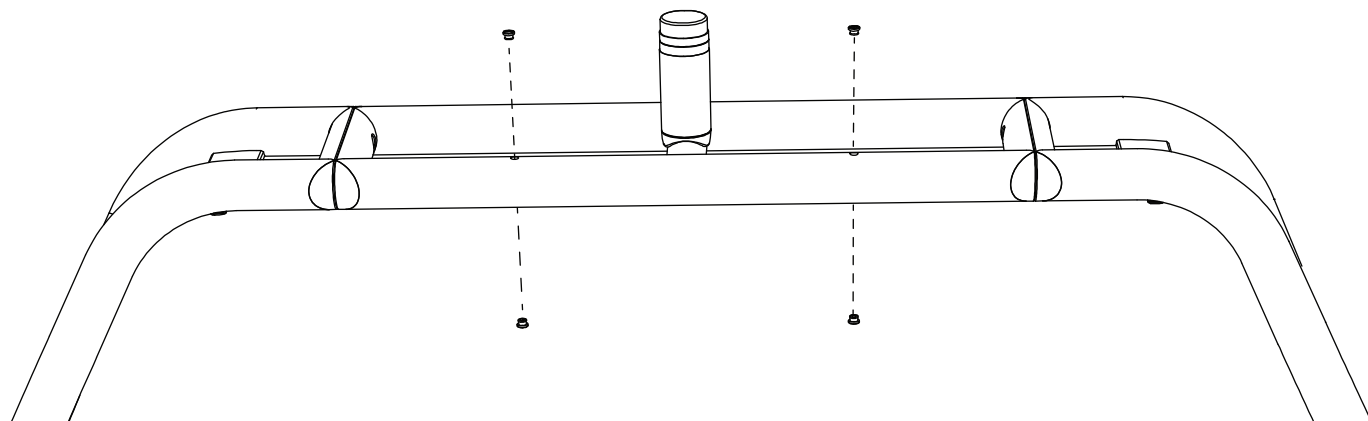


**B**

Insert the two top washers onto the bolts and insert bolts from the top. Once through the tubing, insert the two bottom washers onto the bolts, then apply RED Loctite to ends of bolts and using a 5/32" allen key fasten to the light bar.




x2

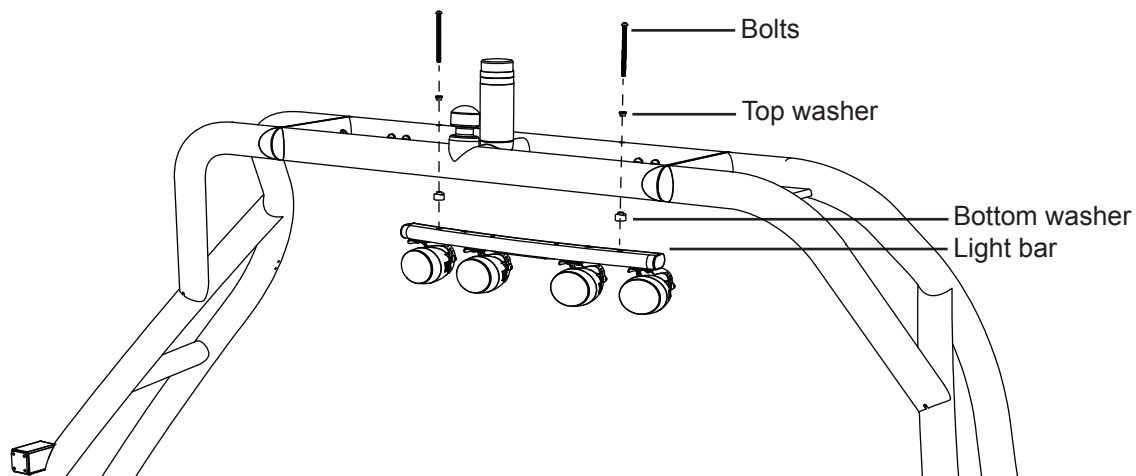


### C

Remove the tower light bar plug (illustrated) and connect your light bar wires to the tower wires according to the diagram in the following step. Use the supplied heat shrinkable butt connectors to connect your wires. Push extra wiring and connectors into the tower.

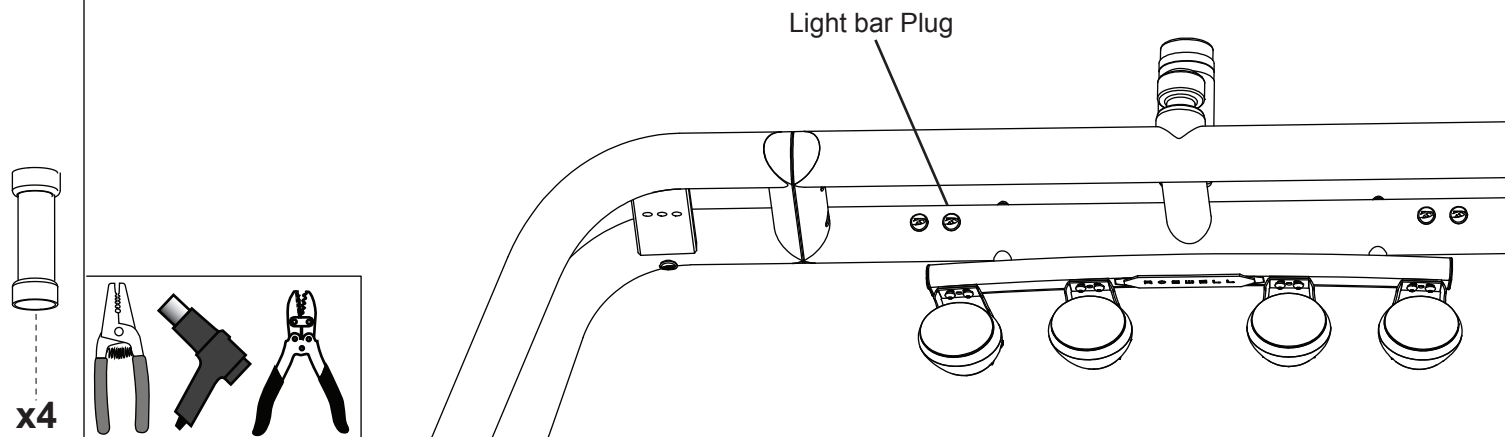

### D

1) Use wire strippers to expose 1/4" of wire on all

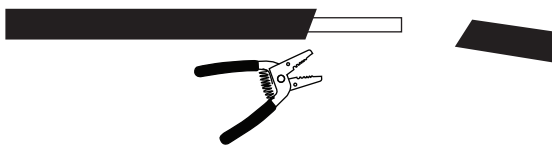

Light Bar					Tower	
Terminal	Function	Wire Color			Wire Color	
2+	Lights +	RED			DARK BLUE	
2 -	Lights -	BLACK			BLACK (Either)	
1+	LED +	YELLOW			LIGHT BLUE	
1 -	LED -	BLUE			BLACK (Either)	

**Crimp**

2) Slide matching wires into opposing ends of the connectors and crimp.  
3) Heat shrink the connectors.