



MAG SWIVEL PARTS


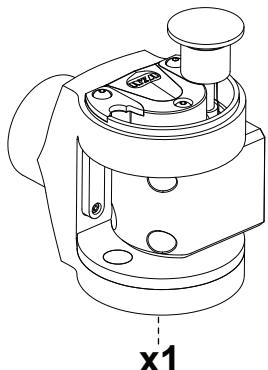


TOOLS REQUIRED

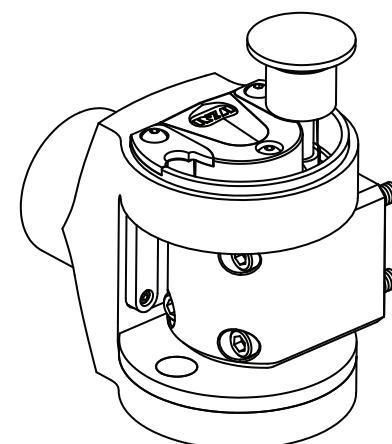

Your MAG Swivel is intended ONLY for assembly with a Roswell tower containing a square pattern board rack mount

A

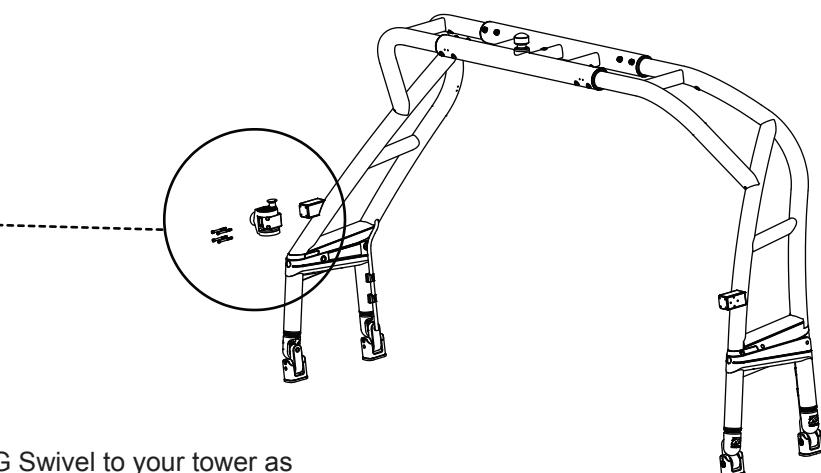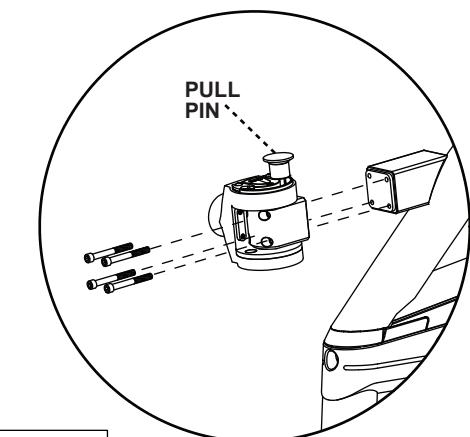


Assemble your MAG Swivel to your tower as illustrated with the Pull Pin facing up. Apply a small drop of red Loctite to each bolt prior to assembly.

Torque bolts to 15ft.lbs


B



Assemble your Roswell rack to your MAG Swivel as illustrated using the hardware provided with your rack. Remember to add a small drop of red Loctite to each bolt prior to assembly.

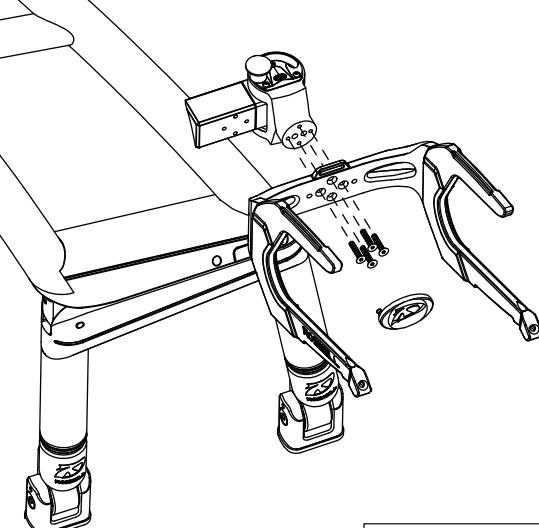

Torque bolts to 15ft.lbs

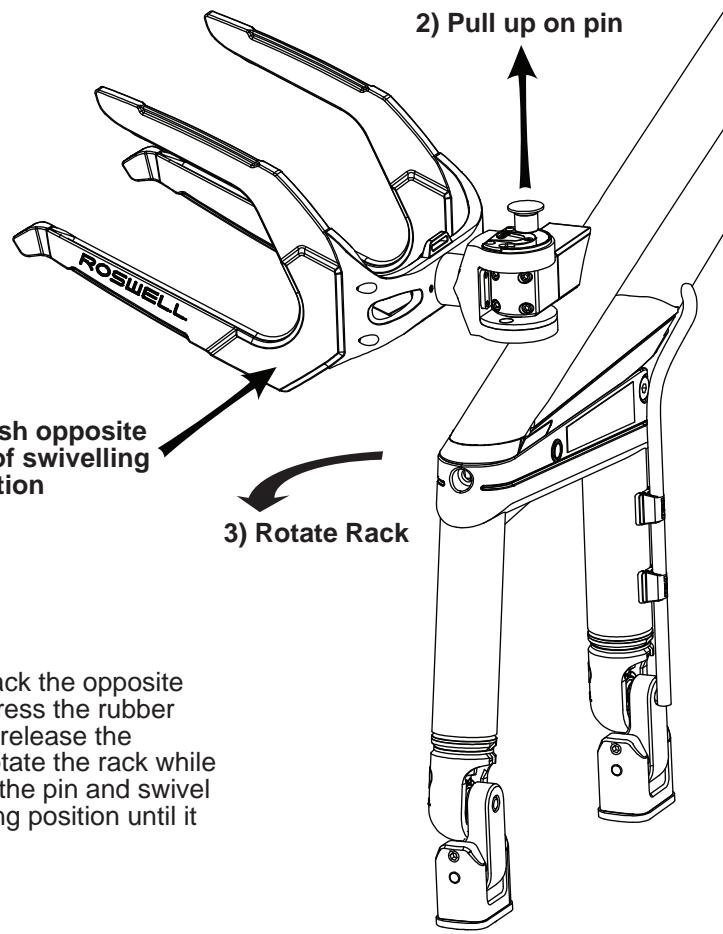C**How to use your MAG Swivel**

To use the swivel, 1) push the rack the opposite way you want to swivel to compress the rubber bumper. 2) Pull up on the pin to release the magnetic lock and 3) begin to rotate the rack while still holding the pin up. Release the pin and swivel the rack towards the other locking position until it locks into place.

D**Overhead View**