




SUPRA

6.5 HLCR Speakers Installation Instructions

Speaker Hardware




Tools Required

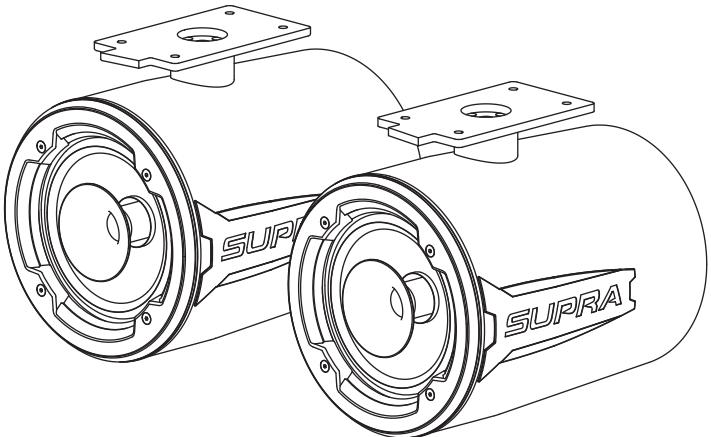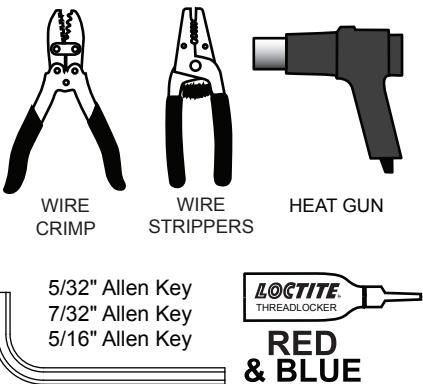


A

Remove the tower speaker cover plate by removing the 4 bolts (save these bolts for Step B).

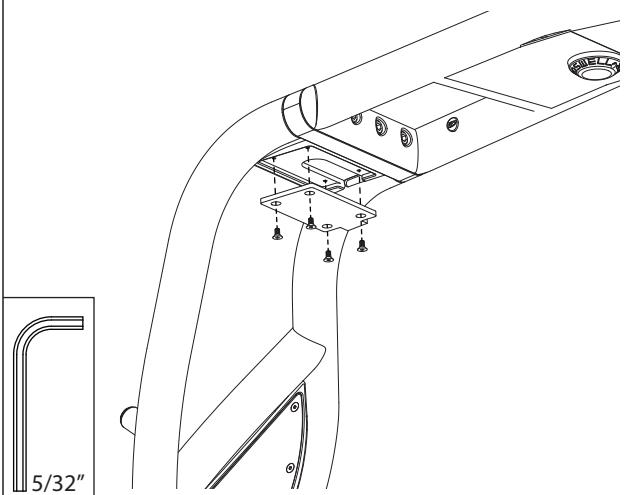


B

Pass all 4 wires through the hole in the speaker mounting plate and, using RED Loctite, mount the plate with the 4 bolts removed in step A. 3" of wire accessibility will be needed.

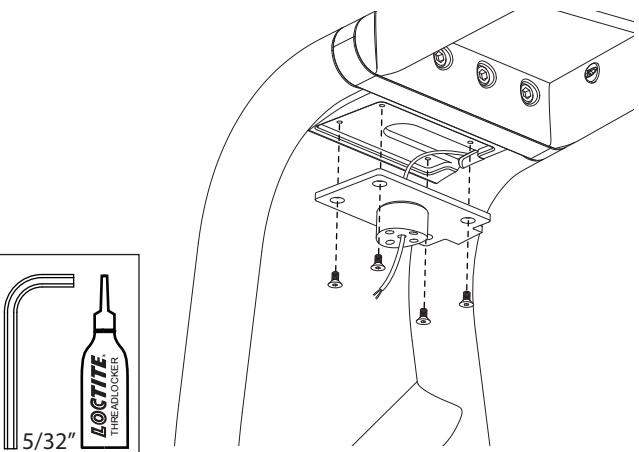


C

Remove the rear bolt from the speaker housing while holding the speaker assembly from the front. Remove the speaker assembly from the housing and set aside.

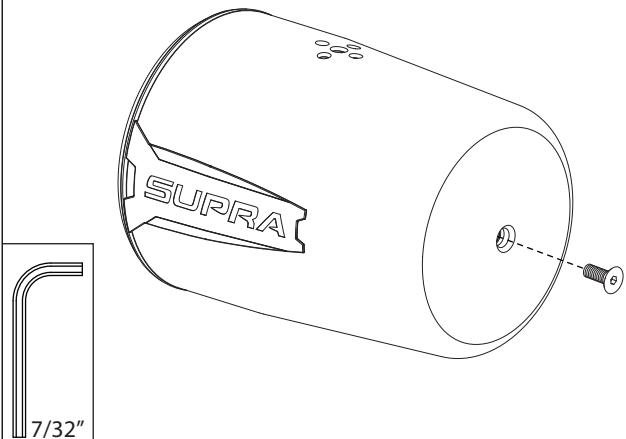


D

Run the wires through the gasket and speaker can, using RED Loctite fasten the can to the two speaker plates using the 4 3/8" bolts.

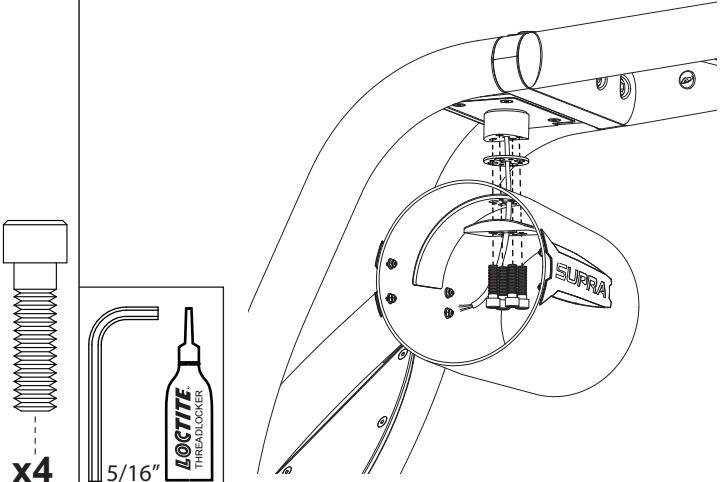


E

Using the hook on the rear of the speaker assembly, hang the assembly on the can and proceed to Step F.

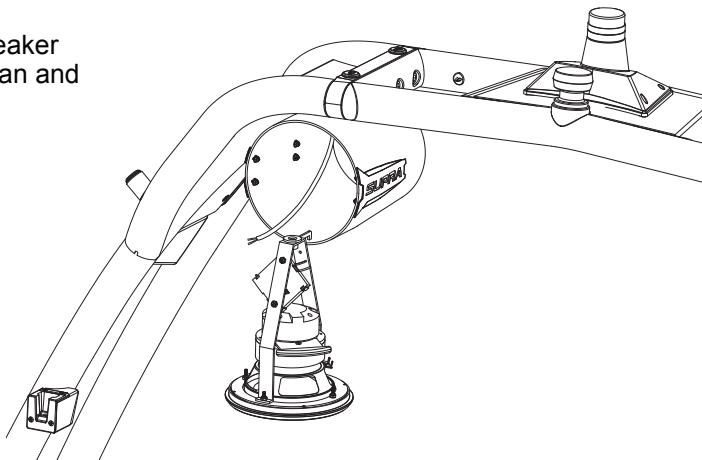

F


- 1) Use wire strippers to expose 1/4" of wire on all wires.
- 2) Slide matching wires (as illustrated) into opposing ends of the connectors and crimp.
- 3) Heat shrink the connectors.



Tower Wires		Speaker Wires	
Port	Starboard	Crimp	
White	Grey	(spk +)	Red
White/Black	Grey/Black	(spk -)	Black
Lt Blue	Lt Blue	(led +)	(led) Yellow
Black	Black	(led -)	(led) Lt Blue
Starboard			
Grey	Grey	(spk +)	Red
Grey/Black	Grey/Black	(spk -)	Black
Lt Blue	Lt Blue	(led +)	(led) Yellow
Black	Black	(led -)	(led) Lt Blue

Crossover 


LED Lights 

Crossover 

LED Lights 

G

Once the speaker wires are connected, re-insert the the speaker assembly into the can. Ensure the speaker stand is facing downward.

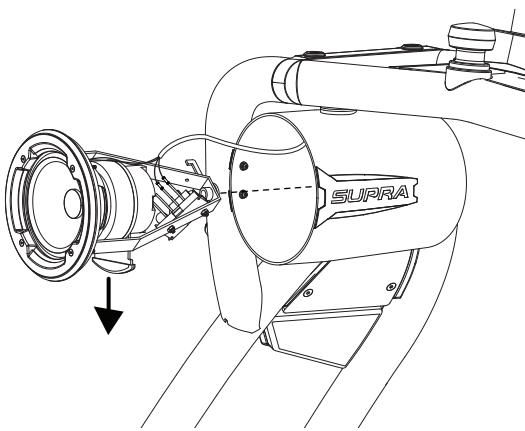

H

Using the bolt from Step C, apply BLUE Loctite and re-fasten the speaker assembly to the can.

