







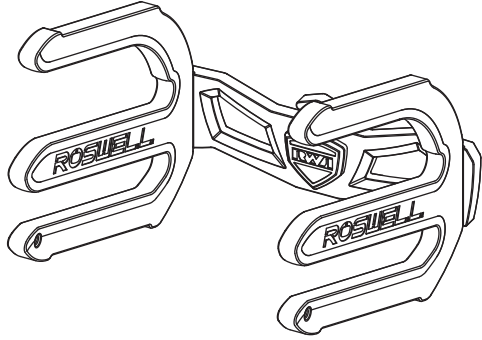
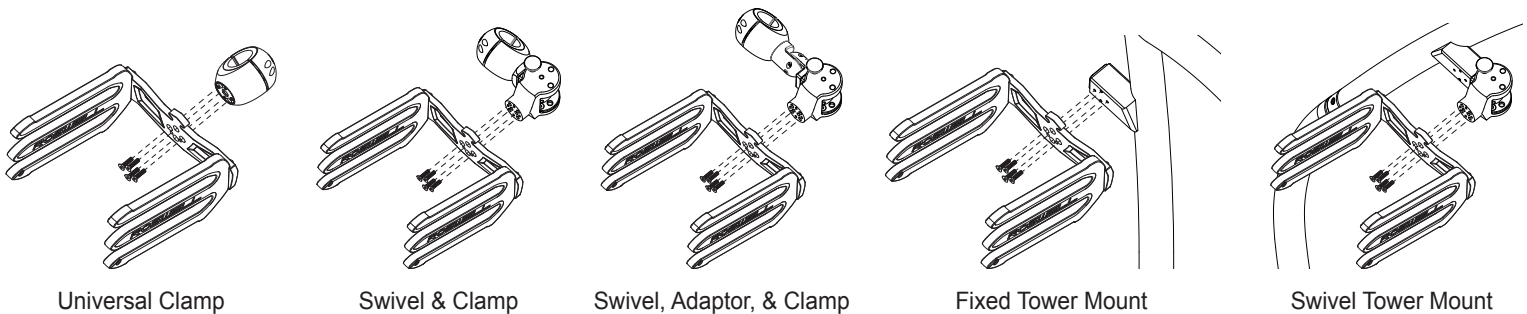




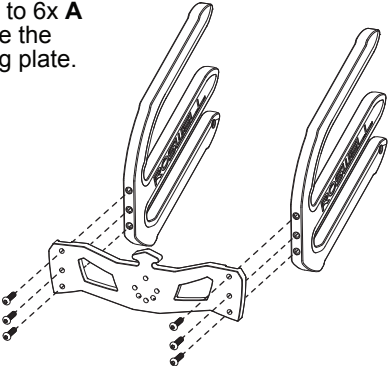


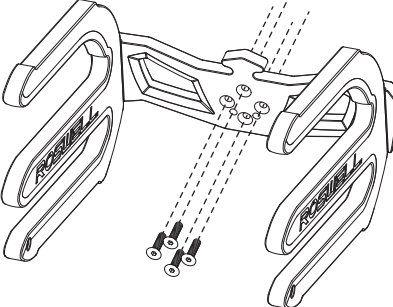






RACK HARDWARE	PARTS	TOOLS REQUIRED	
    A x6 B x4 C x2 D x2	 TINES x2  BACKING PLATE x1  MEDALLION x1	 5/32" Allen Key 3/32" Allen Key	

**** BOARD RACK BUNGEE CORD NOT ILLUSTRATED FOR IMAGE CLARITY ****

Below are the recommended mounting options for Roswell Board Racks.

Installation instructions available with respective mounting products.



A  A x6 	Apply RED Loctite to 6x A bolts and assemble the tines to the backing plate. 	B  B x4 	Apply RED Loctite to 4x B bolts and assemble the backing plate to the mounting accessory of your choice listed above. 
C  C x2 	Apply RED Loctite to both C locking pins and insert into the back of the medallion.  <div> Alternate View  </div>	D  D x2 	Fasten the medallion in place by inserting both D set screws under the backing plate. 