
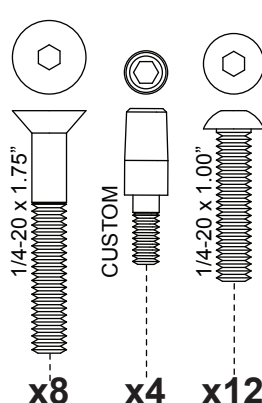
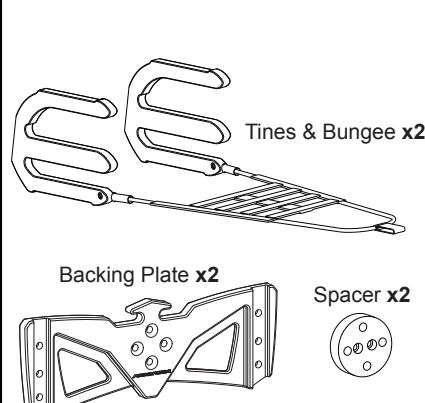
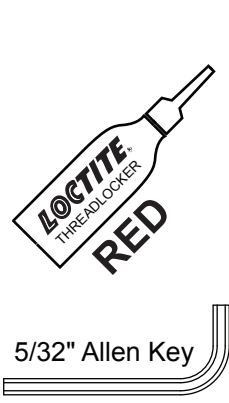
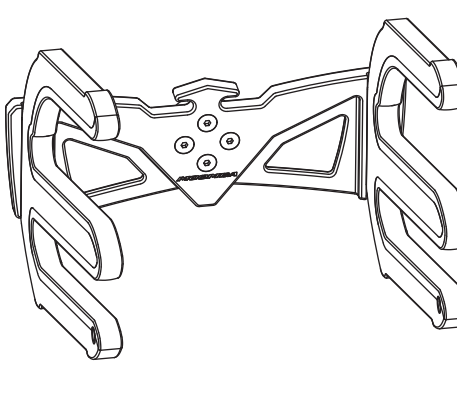


Hardware	Parts	Tools Required	
 <p>1/4-20 x 1.75" x8</p> <p>CUSTOM x4</p> <p>1/4-20 x 1.00" x12</p>	 <p>Tines & Bungee x2</p> <p>Backing Plate x2</p> <p>Spacer x2</p>	 <p>LOCTITE THREADLOCKER RED</p> <p>5/32" Allen Key</p>	

A Apply RED Loctite to 6 button head bolts and mount the backing plate to a set of tines. Make sure the tines are properly seated in the backing plate grooves.

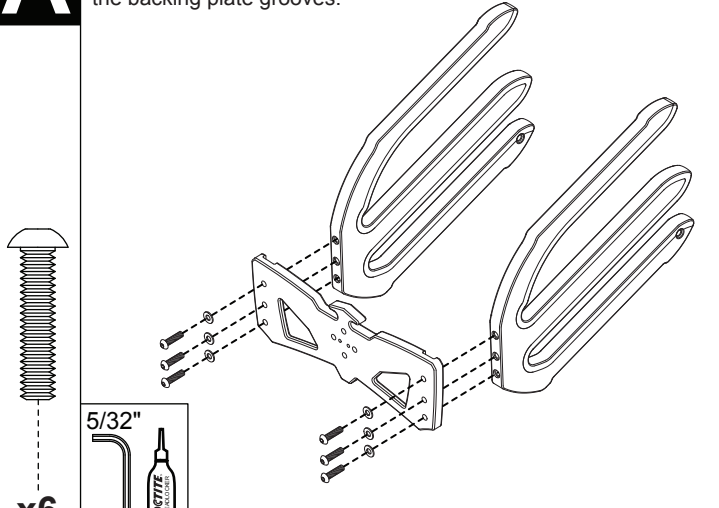


x6

5/32"

LOCTITE

B Apply RED Loctite to 2 custom bolts and assemble spacer to rear of backing plate.

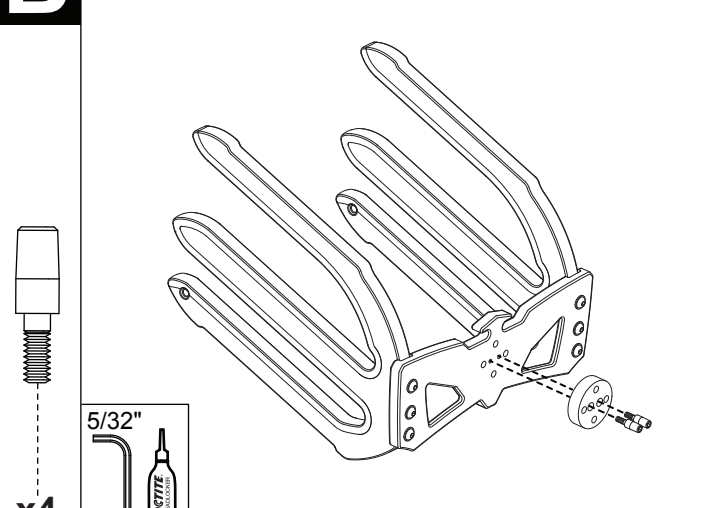


x4

5/32"

LOCTITE

C Apply red Loctite to 4 flat head bolts and mount the rack to the tower. Ensure the spacer is mounted between the rack and the tower.

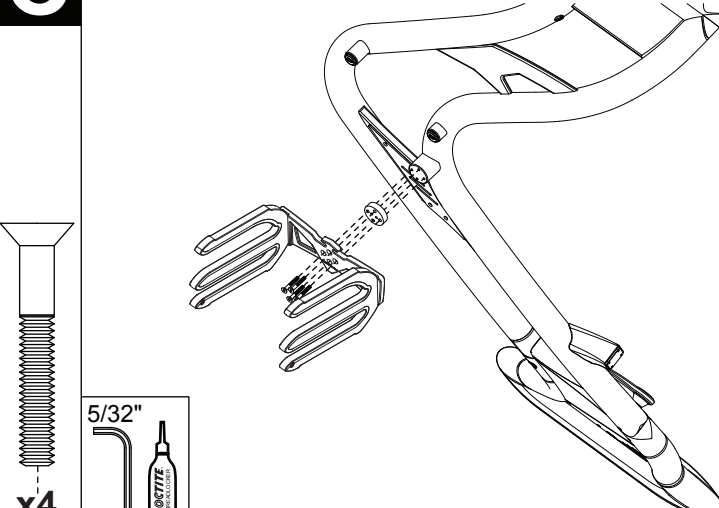

x4

5/32"

LOCTITE